
WILLOW CREEK COMMUNITY CENTER

1200 Willow Lane, Example Township | Fictional training project WC-26-014

S101

DEMONSTRATION ISSUE

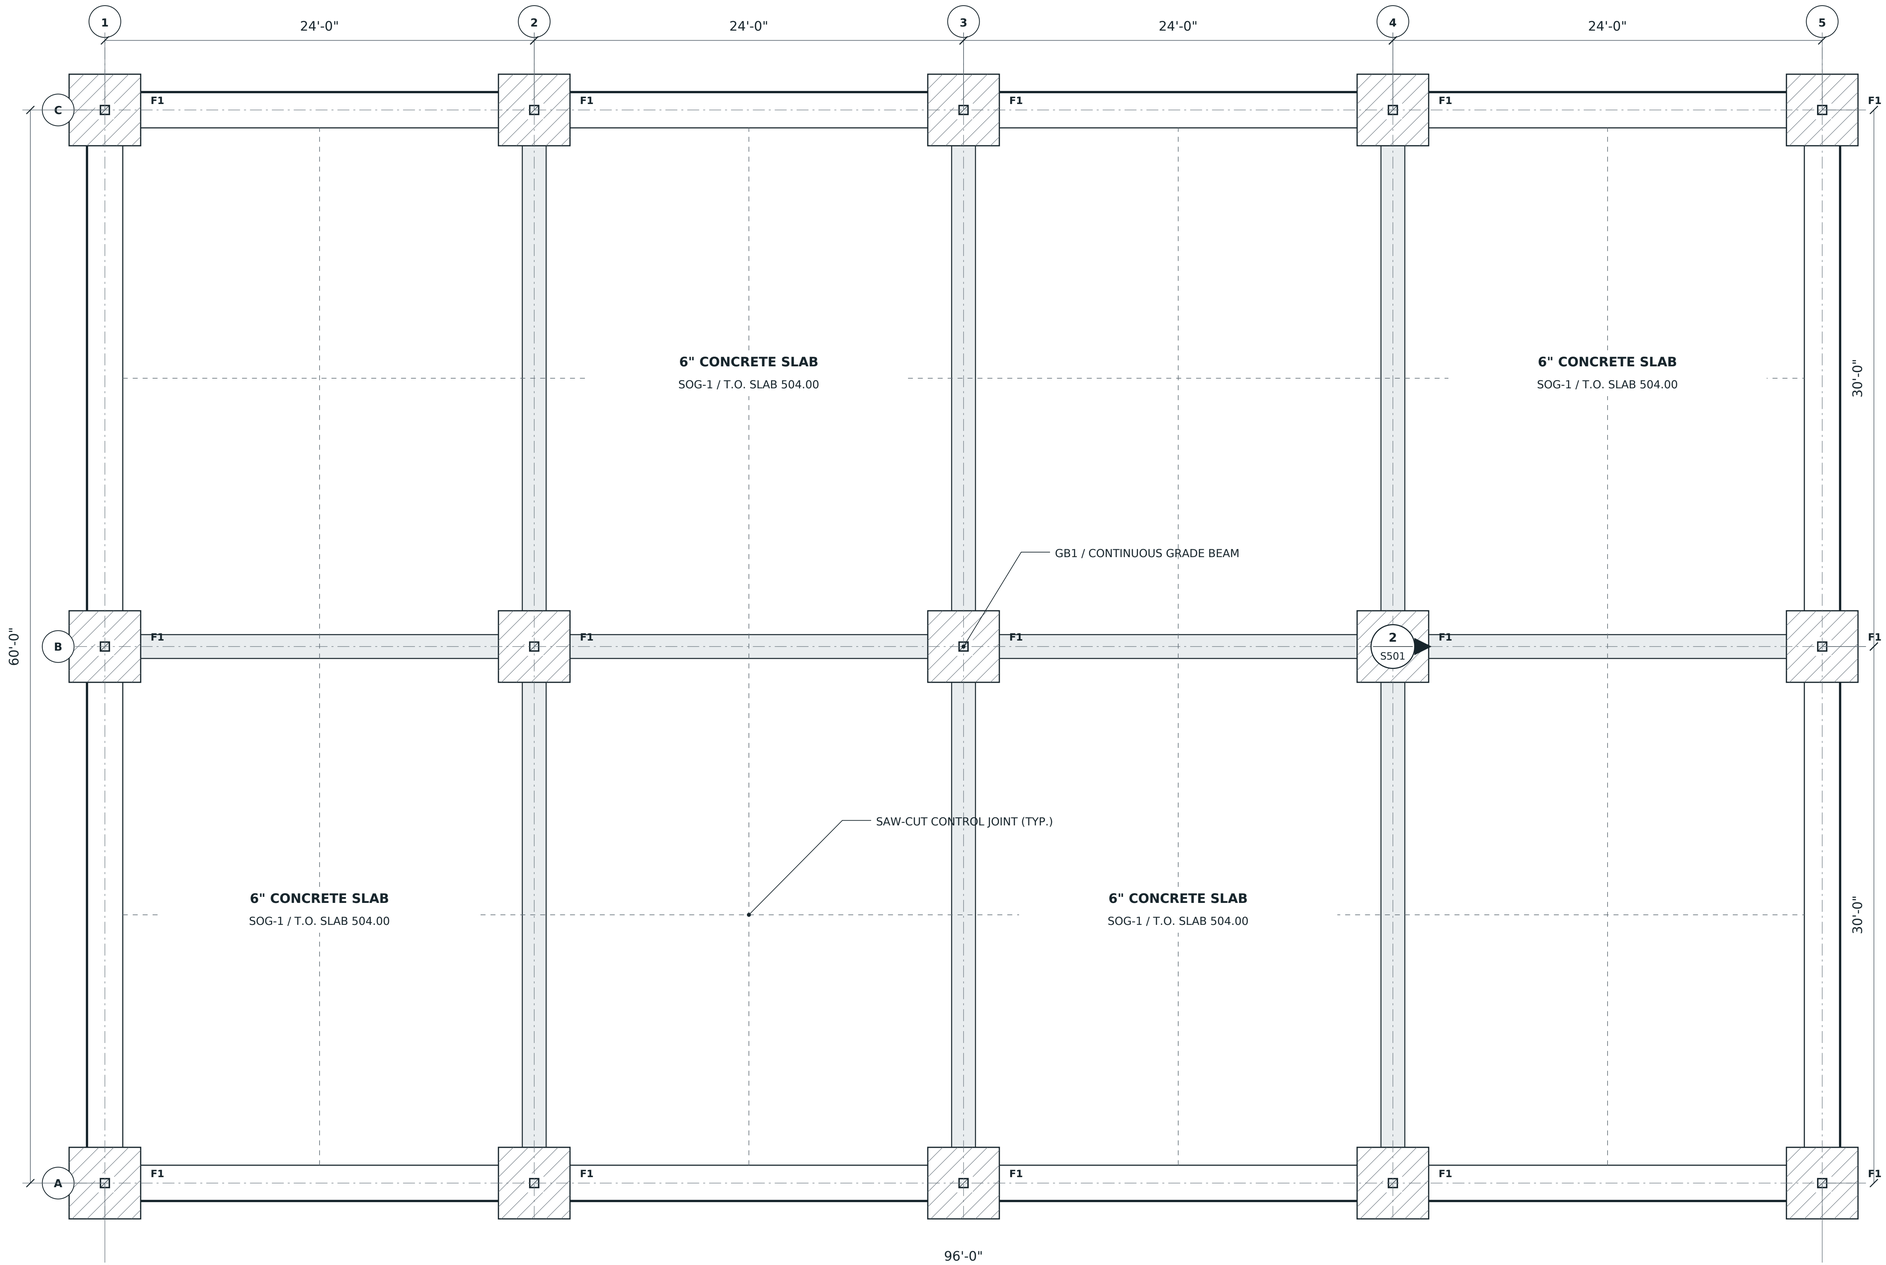

FOUNDATION PLAN / 15 COLUMN GRID INTERSECTIONS

Dimensioned geometry supports area, length, count and gross-volume demonstrations.

FOUNDATION KEY

F1: 4' × 4' × 14" concrete spread footing; 15 locations.

C1: 6" × 6" HSS column; 15 grid intersections.

GB1: 16" × 18" grade beam, shown as a continuous schematic strip.

SOG-1: 6" slab on grade over granular fill.

ITEM	QTY
F1	15 EA
C1	15 EA
SLAB	5,760 SF
6" SLAB	106.67 CY

TRAINING NOTES

Column grid: 5 lines × 3 lines = 15 intersections.

Slab volume = 96 × 60 × 0.5 / 27 = 106.667 cubic yards.

Gross slab quantity excludes beam and footing volumes and makes no deductions.

Reinforcement and member sizes are fictional demonstration assumptions.

No engineering approval is represented.

POLYPDF

DRAWING DEMO LIBRARY

PROJECT

WILLOW CREEK

COMMUNITY CENTER

WC-26-014

ONE-STORY / 5,760 SF

DRAWING TITLE

FOUNDATION PLAN

DISCIPLINE

STRUCTURAL

ISSUE RECORD

REVISION A

2026-09-15

Demonstration issue

Drawn: PP / Checked: QA

SHEET DATA

Scale: 1/4" = 1'-0"

Original: 36 x 24 IN

PDF page 1

Units: feet unless noted

USE NOTICE

FICTIONAL PROJECT

DEMONSTRATION ONLY

NOT FOR CONSTRUCTION

No engineering design, code review or permit approval is implied.

S101

REV A


ORIGINAL SYNTHETIC DRAWING | DEMONSTRATION ONLY - NOT FOR CONSTRUCTION

WILLOW CREEK COMMUNITY CENTER

1200 Willow Lane, Example Township | Fictional training project WC-26-014

S501

DEMONSTRATION ISSUE

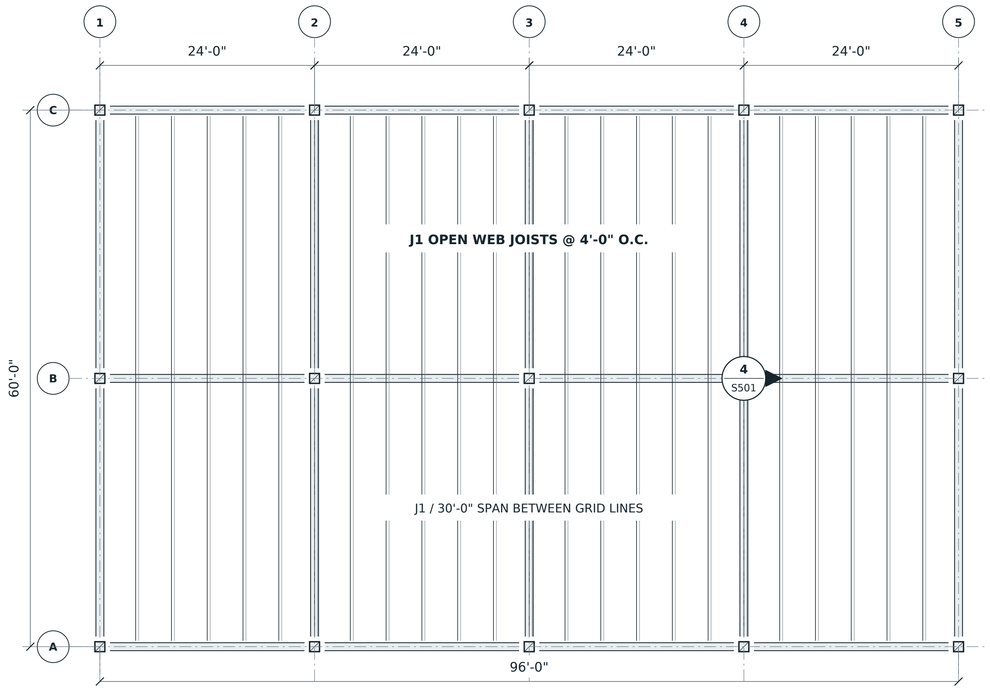

1 ROOF FRAMING PLAN

1/8" = 1'-0"

MARK	DESCRIPTION	REFERENCE / DEMO ONLY
C1	HSS 6 × 6	15 columns at 5 × 3 grid intersections
F1	Spread footing	4' × 4' × 14"; shown on S101
GB1	Grade beam	16" wide × 18" deep schematic section
B1	Roof beam	W12 reference member at grid lines
J1	Roof joist	30' span / 4' nominal spacing

STRUCTURAL COORDINATION NOTES


The roof framing plan is shown at 1/8" = 1'-0". Detail 2 uses 1/2" = 1'-0"; Detail 3 uses 1-1/2" = 1'-0".

Calibrate each drawing viewport independently before measuring. Page-level calibration alone will not match every detail.


F1 and C1 counts are 15 on the foundation sheet and are repeated here for coordination; do not sum repeated views into a takeoff.

All sections are original synthetic demonstration geometry. Structural capacities, connections and reinforcement are not engineered.

GRAPHIC SCALE




T.O. SLAB 504.00

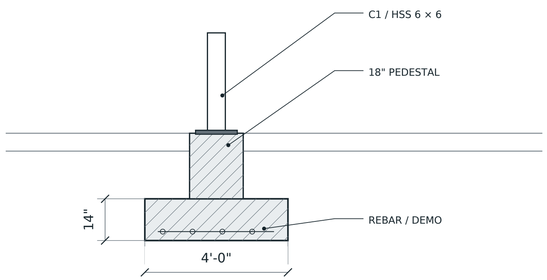

2 F1 FOOTING SECTION

1/2" = 1'-0"


4 ANCHORS / 9" GAUGE / 12" × 12" PLATE

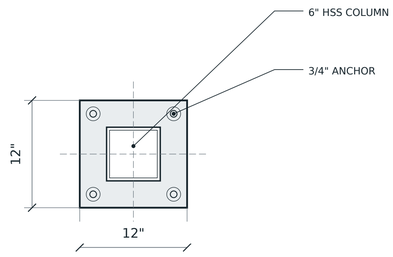

Dimensioned plan is a calibration practice detail.

3 C1 BASE PLATE PLAN

1-1/2" = 1'-0"

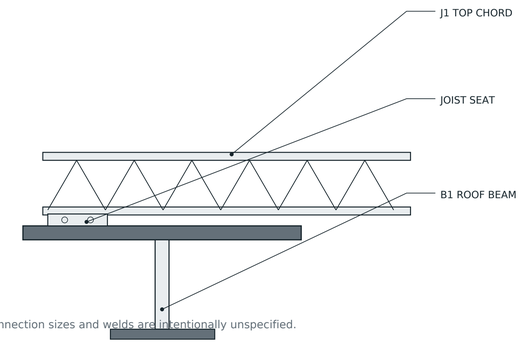

Connection sizes and welds are intentionally unspecified.

4 JOIST / BEAM CONNECTION

SCHEMATIC / NOT TO SCALE

POLYPDF

DRAWING DEMO LIBRARY

PROJECT

WILLOW CREEK
COMMUNITY CENTER
WC-26-014
ONE-STORY / 5,760 SF

DRAWING TITLE

FRAMING & STRUCTURAL DETAILS

DISCIPLINE

STRUCTURAL

ISSUE RECORD

REVISION A
2026-09-15
Demonstration issue
Drawn: PP / Checked: QA

SHEET DATA

Scale: AS NOTED
Original: 36 x 24 IN
PDF page 2
Units: feet unless noted

USE NOTICE

FICTIONAL PROJECT
DEMONSTRATION ONLY
NOT FOR CONSTRUCTION
No engineering design, code review or permit approval is implied.

S501

REV A