
1 LANDSCAPE & SITE FURNISHING PLAN

1/16" = 1'-0"

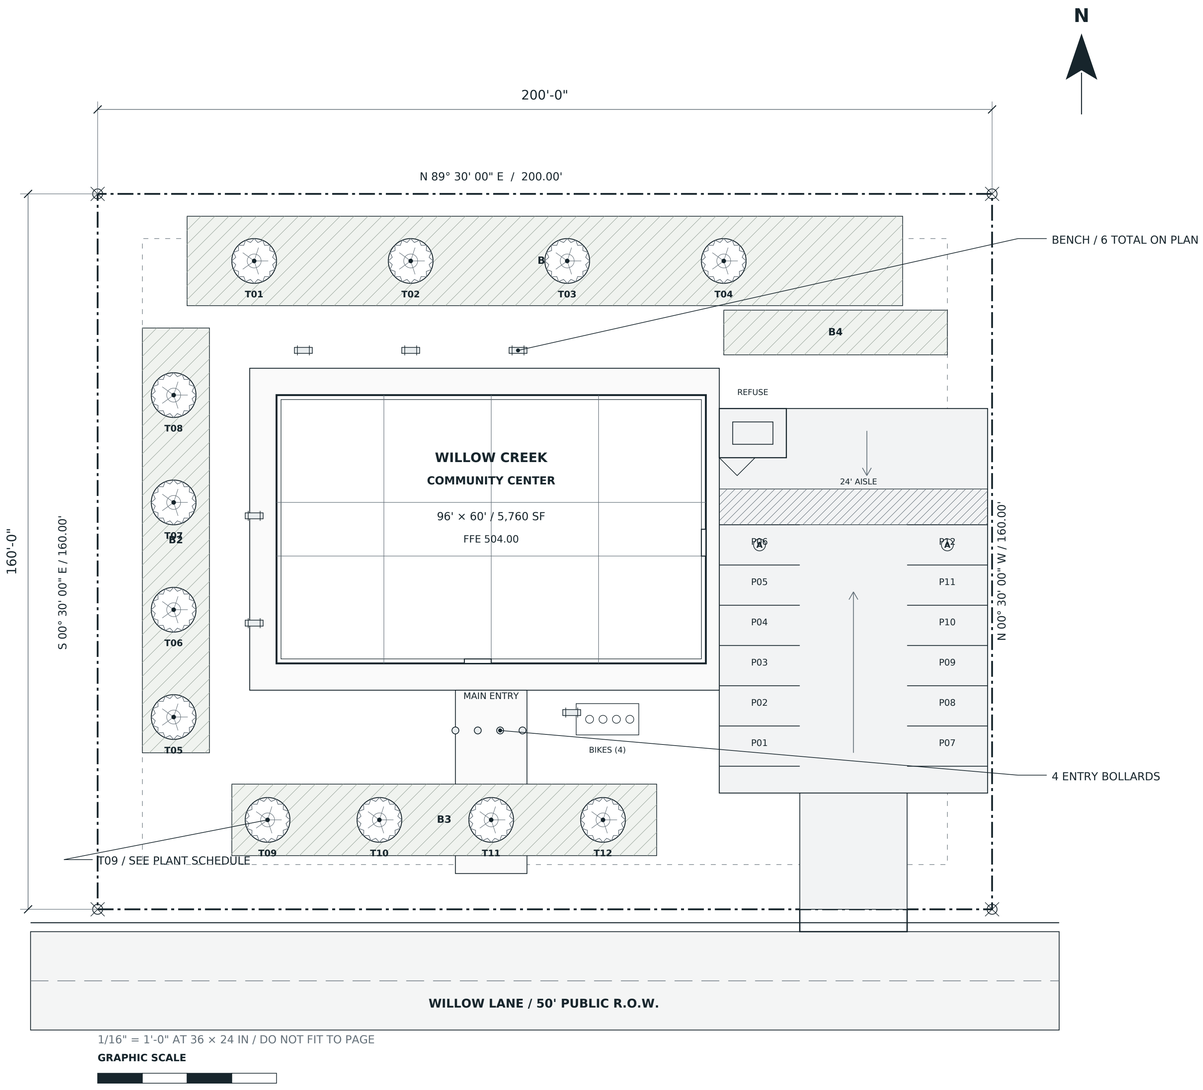

1/16" = 1'-0" AT 36 × 24 IN / DO NOT FIT TO PAGE

GRAPHIC SCALE

0 10 20 30 40 FT

MARK	PLANT / MATERIAL	SIZE / MODULE	QTY
T01–04	Red maple	2.5" cal. / shade tree	4 EA
T05–08	Serviceberry	2" cal. / ornamental	4 EA
T09–12	River birch	2.5" cal. / shade tree	4 EA
B1	North planting bed	160' × 20'	3,200 SF
B2	West planting bed	15' × 95'	1,425 SF
B3	South planting bed	95' × 16'	1,520 SF
B4	East planting bed	50' × 10'	500 SF
BENCH	Site bench	6' nominal	6 EA
BOLLARD	Entry bollard	Diagram symbol	4 EA

LANDSCAPE KEYNOTES

01 Twelve tree symbols occur in the plan. The tree in the legend is a separate specimen symbol and is excluded from the count.

02 The four rectilinear planting-bed areas total 6,645 square feet. Count and measure beds separately from tree crowns.

03 Plant sizes and species are training assumptions; climate suitability and irrigation requirements are not established.

04 Furnishings are diagram symbols. Tags T01 through T12 provide reliable text-search targets for navigation.

05 Site and building footprints are repeated from C101 for coordination. Do not add duplicate drawing views to a takeoff.

SYMBOL LEGEND

Tree crown / plan tags T01–T12

Diagonal green hatch / planting-bed area

Narrow double rectangle / site bench

Small filled circle / bollard

TREE LEGEND SYMBOL

EXCLUDE FROM PLAN TREE COUNT

DEMONSTRATION WORKFLOW

Calibrate using the 200-foot parcel edge. Count 12 trees in the plan, then assign species groups using the schedule.

Measure B1 through B4 as four independent filled polygons. Their combined geometric area is 6,645 SF.

POLYPDF

DRAWING DEMO LIBRARY

PROJECT

WILLOW CREEK

COMMUNITY CENTER

WC-26-014

ONE-STORY / 5,760 SF

DRAWING TITLE

LANDSCAPE PLAN

DISCIPLINE

LANDSCAPE / SITE

ISSUE RECORD

REVISION A

2026-09-15

Demonstration issue

Drawn: PP / Checked: QA

SHEET DATA

Scale: 1/16" = 1'-0"

Original: 36 x 24 IN

PDF page 1

Units: feet unless noted

USE NOTICE

FICTIONAL PROJECT

DEMONSTRATION ONLY


NOT FOR CONSTRUCTION

No engineering design, code review or permit approval is implied.

L101

REV A


CROWN AND STAKING ARE SCHEMATIC; PIT DIMENSIONS ARE TO SCALE.

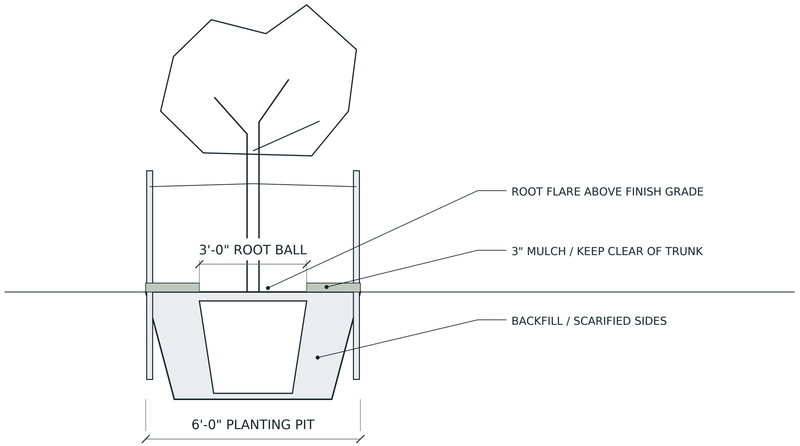

1 TREE PLANTING SECTION

1/2" = 1'-0"


MATERIAL LAYERS ARE MEASURABLE AT THE DETAIL SCALE.

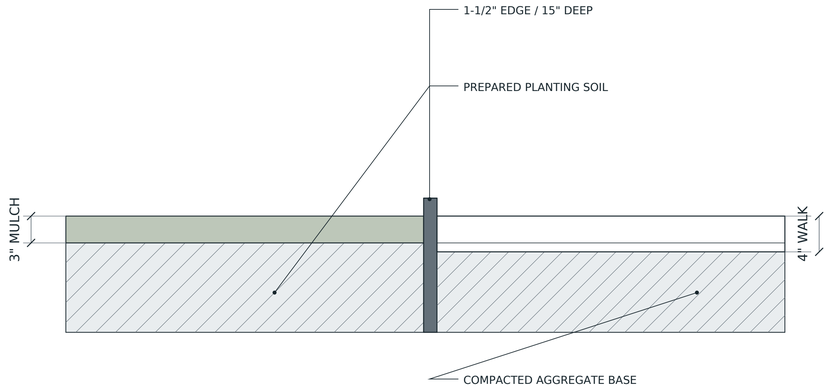

2 PLANTING BED / WALK EDGE

1-1/2" = 1'-0"

SIX INSTANCES ON PLAN L101 / DETAIL VIEW IS EXCLUDED FROM COUNT.

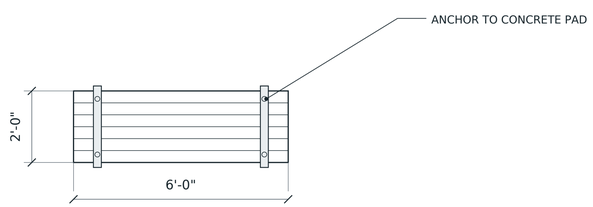

3 SITE BENCH PLAN

1/2" = 1'-0"

MARK	GEOMETRIC AREA	COUNT / GROUP
B1	160 × 20 = 3,200 SF	NORTH BED
B2	15 × 95 = 1,425 SF	WEST BED
B3	95 × 16 = 1,520 SF	SOUTH BED
B4	50 × 10 = 500 SF	EAST BED
TOTAL	6,645 SF / 4 POLYGONS	12 TREES ON L101

LANDSCAPE DETAIL NOTES

The planting section, bench and tree legend are repeated explanatory views; count trees and furnishings on L101 only.

This sheet deliberately combines three scales. Calibrate each detail from its labeled dimension before measuring.

Specifications are fictional and simplified for markup, measurement, search and extraction demonstrations.

POLYPDF

DRAWING DEMO LIBRARY

PROJECT

WILLOW CREEK

COMMUNITY CENTER

WC-26-014

ONE-STORY / 5,760 SF

DRAWING TITLE

PLANTING & SITE DETAILS

DISCIPLINE

LANDSCAPE / DETAILS

ISSUE RECORD

REVISION A

2026-09-15

Demonstration issue

Drawn: PP / Checked: QA

SHEET DATA

Scale: AS NOTED

Original: 36 x 24 IN

PDF page 2

Units: feet unless noted

USE NOTICE

FICTIONAL PROJECT

DEMONSTRATION ONLY

NOT FOR CONSTRUCTION

No engineering design, code review or permit approval is implied.

L501

REV A